


TECHNICAL DATASHEET

INDUS 100W SMD IP65

01-07-2020

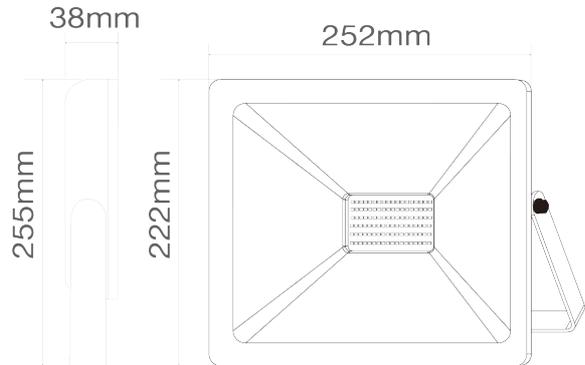

VT/INDUS/100W/SMD/6000K/IP65/GEN4/LED FLOODLIGHT

NOTES

General Informations

Stock Code	3022230
HSC/GTIP Code	9405.40.10.00.00
EAN-13 (Inbox Barcode)	not available yet
ITF-14 (Outbox Barcode)	not available yet

Electrical Characteristics

Current Type	AC
Operation Voltage	220-240 Volt
Operation Frequency	50/60 Hertz
Electrical Current	0,483 Amper
Power	100 Watt
Power Factor	>0.9
Luminous Efficiency	100 lumen/Watt
Energy Savings	>0.80
Dimmable	No
Electrical Protection Class	Class I

Electrical Component Specifications

Component Fitting Type	Internal Driver
Driver Input Voltage	220-240 Volt
Driver Input Current	0,483 Amper

Lighting Characteristics

Luminous Flux	10000 lumen
Time for 60% of Lumen	<0.5 seconds
Light Beam Angle	120°
Flicker	No
LED Type	SMD

Mechanical Parameters

IP Protection Class	IP65
Switch On/Off Cycle	15000
Lifetime	25000 hours
Body Material	Glass & Aluminum
Body Colour	Black
Diffuser Material	Tempered Glass
Product Height	222 millimeter
Product Width	252 millimeter
Product Depth	38 millimeter
Ambient Temperature (Ta)	-20°C<Ta<50°C

Logistic Informations

Inbox Length	355 millimeter
Inbox Width	50 millimeter
Inbox Height	388 millimeter
Outbox Length	525 millimeter
Outbox Width	275 millimeter
Outbox Height	305 millimeter
Outbox Volume	0,04403 m ³
Outbox Quantity	10 pieces
Unit Net Weight	1,57 kilogram
Outbox Net Weight	15,7 kilogram
Outbox Gross Weight	17,66 kilogram

IMPORTANT NOTES: VITO reserves the right to change/remove models or specifications partially/completely without any notice. Information, models and photographs of the products in this technical datasheet can not be used, reproduced or republished without permission. However, some parts can be quoted by giving reference and/or chapter number belonging to technical datasheet. Most of the items in the datasheet have been designed by our company within indicated technical specifications inside. Our company is not responsible for errors caused by wrong installation and operating against rules according to qualifications specified in the product details. Photographs printed in this datasheet may not reflect the actual color of the product depending on printing conditions. In the same context, typographical errors may possibly be found in the texts.