


TECHNICAL DATASHEET

ATAKAMA SOLAR LED FLOODLIGHT SERIES



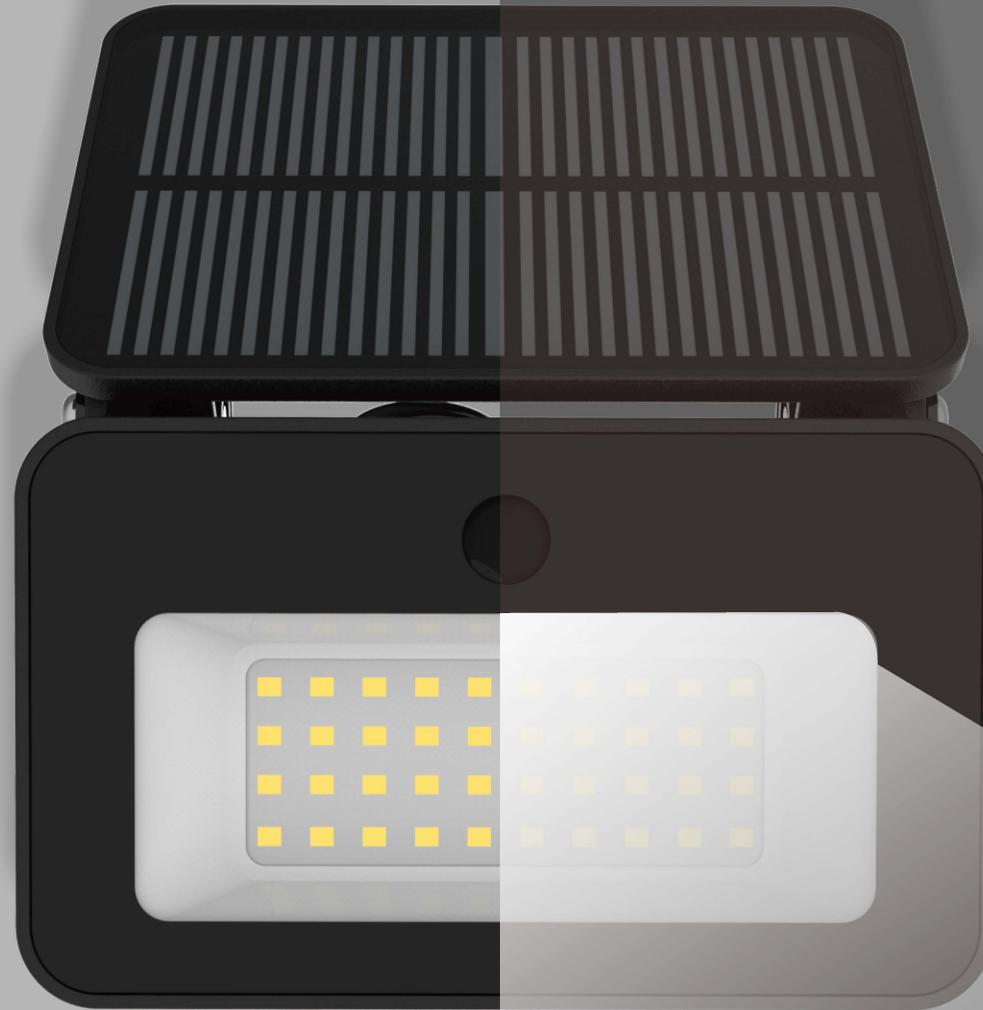

Charging during daytime



Auto turn on at night





3M

120°

Sensing Angle 120°, Sensing distance 3 meters.

3000K



4000K



6500K



CCT switch

vito
all about lighting



Mode 1



Motion Sensor

Light Off



Full Brightness(30s)



120°

Light Off



Mode 2



Motion Sensor

Light Off



Half Brightness(30s)



120°

Light Off



Mode 3



Motion Sensor

Light Off



Low Brightness(30s)



120°

Light Off





REPLACEABLE BATTERY





IP65 Waterproof



Front



Back







Side



Foldable



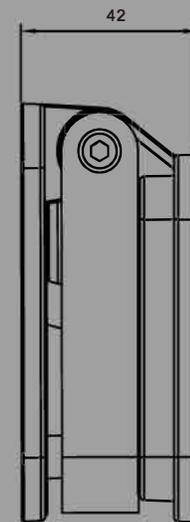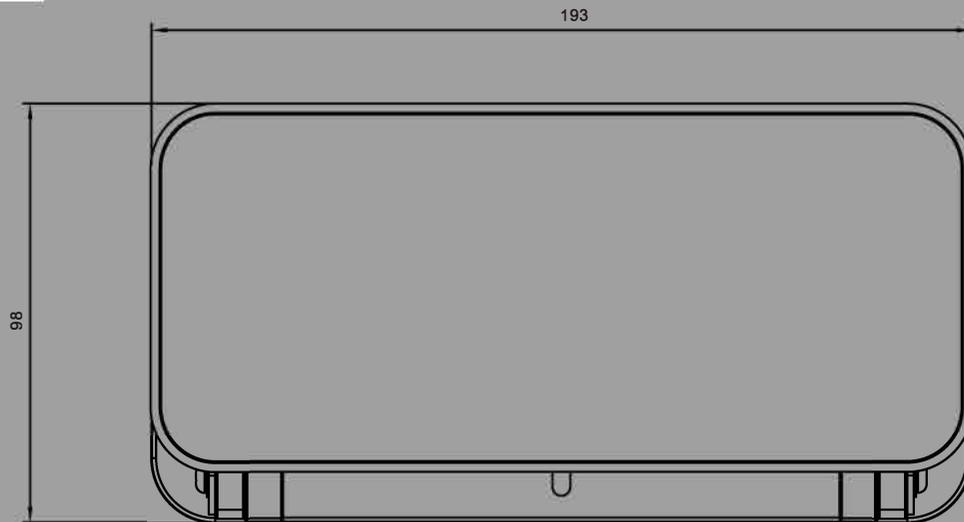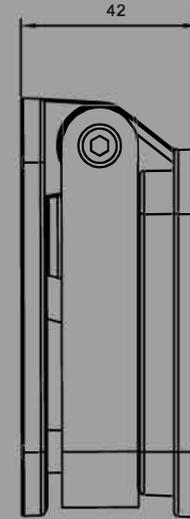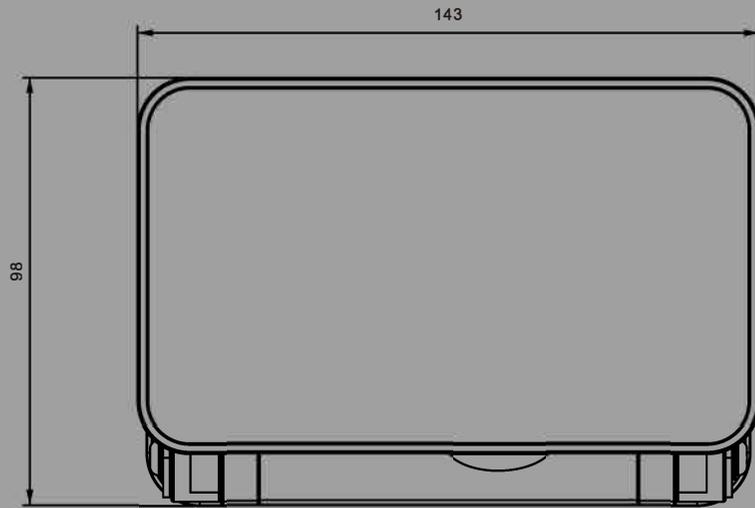

Item Code	01	02
Material of body	ABS+Glass	
Sensor	PIR	
Solar Panel	5V 1.75W monocrystalline PET panel	5V 2.5W monocrystalline PET panel
Battery	3.7V 2200mAh	3.7V 2600mAh
Leds	40PCS 2835 3xCCT	48PCS 2835 3xCCT
Lumen	3x steps MAX. 1000lm	3x steps MAX. 1300lm
Sensing Times	Sensing 200 times	Sensing 300 times
Charging Hours	6-8hrs	
Sensor Angle	MAX. 120 degrees	
Sensing Distance	3m	
Waterproof	IP65	
Warranty	2 Years	
Packing(cm)	20pcs/31.5x27x22cm	20pcs/41.5x27x22cm
Body Size(mm)	143x97x44.5mm	194x97x44.5mm

vito[®]
all about lighting